



Application and Sales Office:

29235 Lorie Ln. PO Box 1013

Wixom, MI 48393-1013


Phone 248-344-7236

Fax 248-344-9401

E-Mail: tbradley@cdims.com

CDH-R-133-Mobile-Dry Units

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-133-E	4,000	Electric	90"	48 1/4"	66"	1,600 lbs
CDH-R-133-G	4,000	Gas	90"	48 1/4"	66"	1,600 lbs

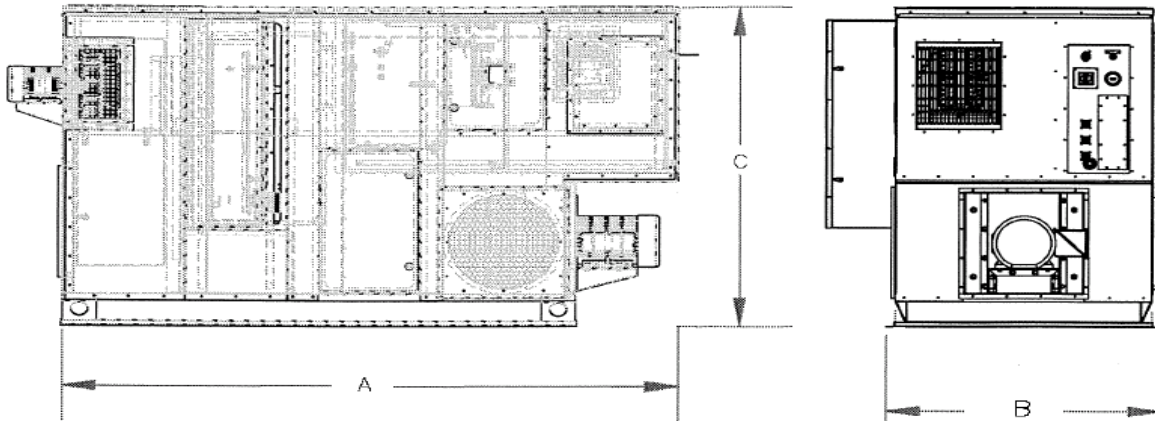

Model	Air Volume	Static Pressure External	Moisture Removal Lbs/Hr	Moisture Removal Gallons/Day	Moisture Removal Lbs/Hr	Moisture Removal Gallons/Day	Moisture Removal Lbs/Hr	Moisture Removal Gallons/Day
			80°/60% RH	80°/60% RH	55°/80% RH	55°/80% RH	40°/80% RH	40°/80% RH
CDH-R-133-E	4,000	4.0	100	286	84	240	50	142
CDH-R-133-G	4,000	4.0	100	286	84	240	50	142

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load	Electric Reactivation FLA Load	Gas Reactivation FLA Load	Gas Reactivation FLA Load	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
			230/1/60	460/3/60	460/3/60	575/3/60		
N/A	N/A	N/A	N/A	120	N/A	100	N/A	N/A
1"	7-14" w.c.	7-14" w.c.	60	N/A	30	30	240	3.6

Available Accessories:

- (2) Swivel Locking and (2) Fixed Castors
- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- 18" Round Supply Connections
- 20" Round Supply Connections
- 10" Round Reactivation Connections
- 12" Round Reactivation Connections
- Round Connections

