





Advanced Reactive Drying

5931 Ford Court Brighton, MI 48116 • 810.229.7900
 Fax: 810.229.7908 • sales@cdims.com • cdims.com

MS-17500/15000-ARID-Dry Units

Model	CFM	Fuel Type	"A" Dim.	"B" Dim.	"C" Dim.	Weight
CDH-R-168	17,500/15,000*	Gas or Electric	211"	104"	88"	13,500 lbs
CDH-R-168	17,500/15,000*	Dual	211"	104"	88"	13,500 lbs

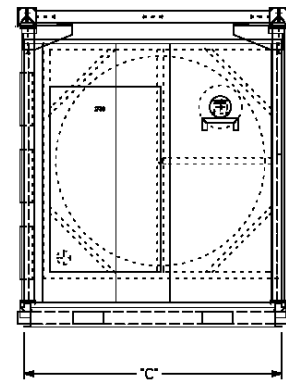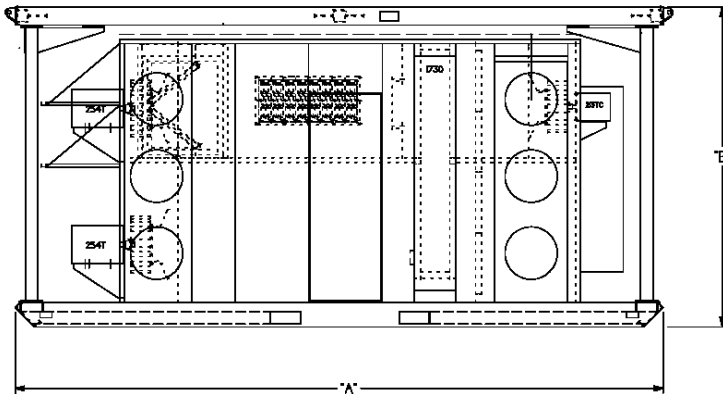

Max Air Volume	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
17,500	424	1,221	355	1,022	242	697

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	CFM Gas Max Usage NG	Gallon/HR Max Usage LP
1"	7-14" w.c.	7-14" w.c.	N/A	335	44	1,200	12.7

Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting with generators
- (3) 18" or 20" Round Connections

