




Advanced Reactive Drying

5931 Ford Court Brighton, MI 48116 • 810.229.7900

Fax: 810.229.7908 • sales@cdims.com • cdims.com

MS-2400/2000 Mobile-Dry Units

Model	CFM	Fuel Type	"A" Dim.	"B" Dim.	"C" Dim.	Weight
CDH-R-126-2.0-E	2,400/2,000*	Electric	91 5/8"	29 1/8"	50"	800 lbs
CDH-R-126-2.0-G	2,400/2,000*	Gas	91 5/8"	29 1/8"	50"	800 lbs

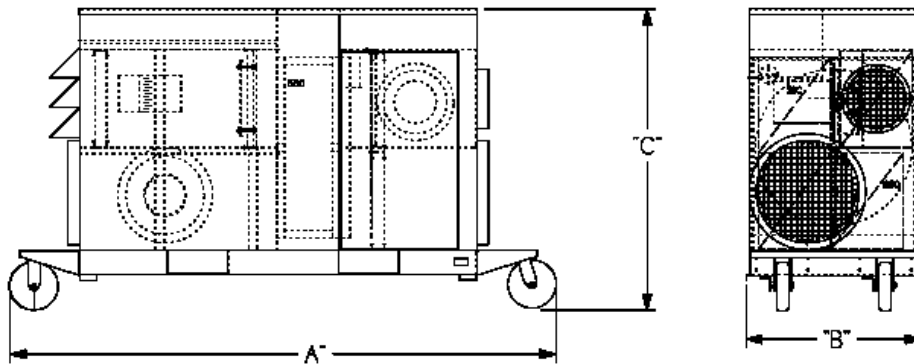

Model	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
CDH-R-126-2.0-E	50	143	42	120	25	71
CDH-R-126-2.0-G	50	143	42	120	25	71

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 575/3/60	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
N/A	N/A	N/A	N/A	51	N/A	50	N/A	N/A
1/2"	7-14" w.c.	7-14" w.c.	30	N/A	15	15	120	1.8

Available Accessories:

- (2) Swivel Locking and (2) Fixed Castors
- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- 18" or 20 " Round Supply Connections
- 12" Round Reactivation Connections

