





# Advanced Reactive Drying

5931 Ford Court Brighton, MI 48116 • 810.229.7900  
 Fax: 810.229.7908 • sales@cdims.com • cdims.com

## MS-27500/25000-ARID-Dry Units

| <u>Model</u> | <u>CFM</u>    | <u>Fuel Type</u> | <u>"A" Dim.</u> | <u>"B" Dim.</u> | <u>"C" Dim.</u> | <u>Weight</u> |
|--------------|---------------|------------------|-----------------|-----------------|-----------------|---------------|
| CDH-R-185    | 27,500/25,000 | Gas or Electric  | 190"            | 101½"           | 101½"           | 15,300 lbs    |

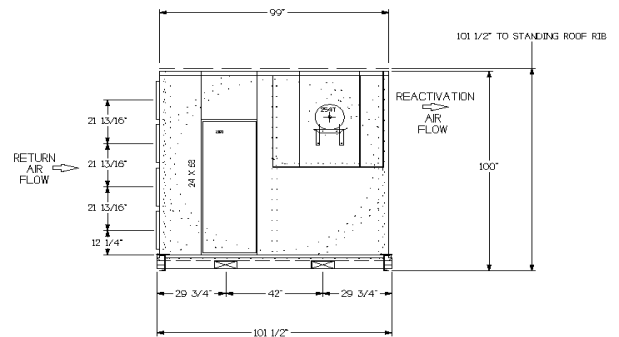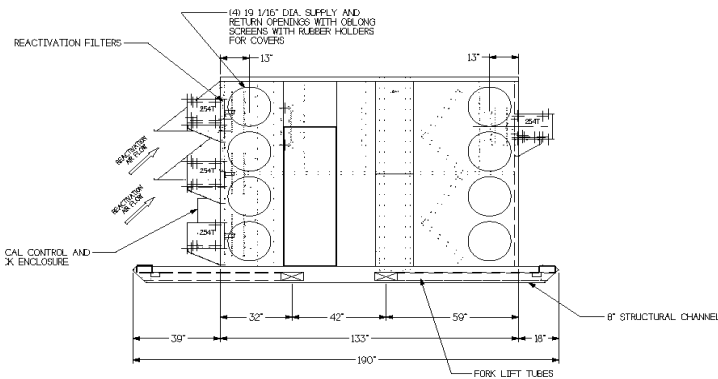

| Max Air Volume | Moisture Removal Lbs/Hr 80°/60% RH | Moisture Removal Gallons/Day 80°/60% RH | Moisture Removal Lbs/Hr 55°/80% RH | Moisture Removal Gallons/Day 55°/80% RH | Moisture Removal Lbs/Hr 40°/80% RH | Moisture Removal Gallons/Day 40°/80% RH |
|----------------|------------------------------------|---|------------------------------------|---|------------------------------------|---|
| 27,500         | 678                                | 1,953                                   | 568                                | 1,635                                   | 387                                | 1,115                                   |

| Pipe Size | LP Inlet Pressure | Natural Gas Inlet Pressure | Electric Reactivation Load 230/1/60 | Electric Reactivation FLA Load 460/3/60 | Gas Reactivation FLA Load 460/3/60 | CFH Gas Max Usage NG | Gallon/HR Max Usage LP |
|-----------|-------------------|----------------------------|-------------------------------------|---|------------------------------------|----------------------|------------------------|
| 1"        | 7-14" w.c.        | 7-14" w.c.                 | N/A                                 | 485                                     | 70                                 | 1,724                | 18                     |



### Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- (4) 18" or 20" Round Connections