




Advanced Reactive Drying

5931 Ford Court Brighton, MI 48116 • 810.229.7900
 Fax: 810.229.7908 • sales@cdims.com • cdims.com

MS-6000/5000 ARID-Dry Units

Model	CFM	Fuel Type	"A" Dim.	"B" Dim.	"C" Dim.	Weight
CDH-R-138	6,000/5,000*	Gas or Electric	170"	49"	79"	4,800 lbs**
CDH-R-138	6,000/5,000*	Dual	170"	49"	79"	4,800 lbs**

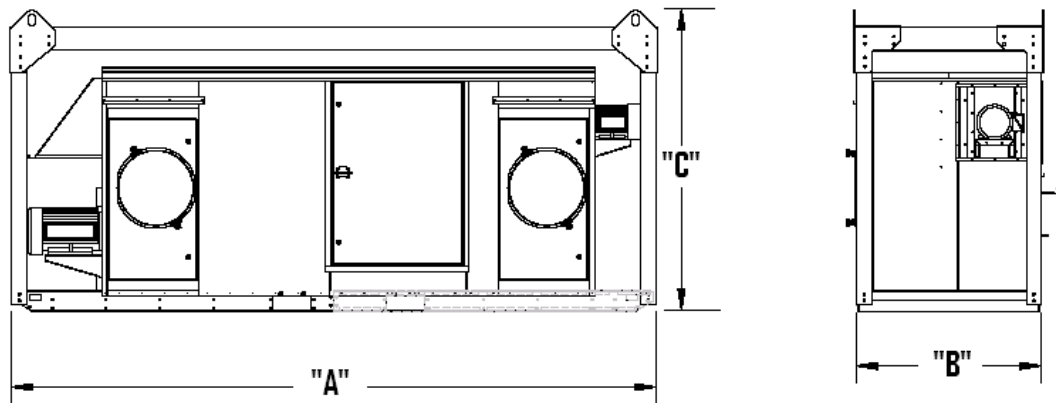

Max Air Volume	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
6,000	136	392	115	331	75	216

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
¾"	7-14" w.c.	7-14" w.c.	N/A	138	13	400	4.4



Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting with generators
- 5.0 Static Pressure External
- 18" or 20" Round Connections
- Protective Cage (as shown)