





## Advanced Reactive Drying

5931 Ford Court Brighton, MI 48116 • 810.229.7900

Fax: 810.229.7908 • sales@cdims.com • cdims.com

### MS-8500/7500-ARID-Dry Units

Model	CFM	Fuel Type	"A" Dim.	"B" Dim.	"C" Dim.	Weight
CDH-R-148	8,500/7,500*	Gas or Electric	158"	62 1/2"	85"	6800 lbs**
CDH-R-148	8,500/7,500*	Dual	180"	62 1/2"	85"	7700 lbs**

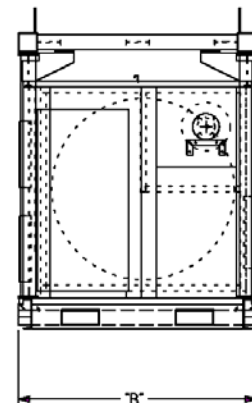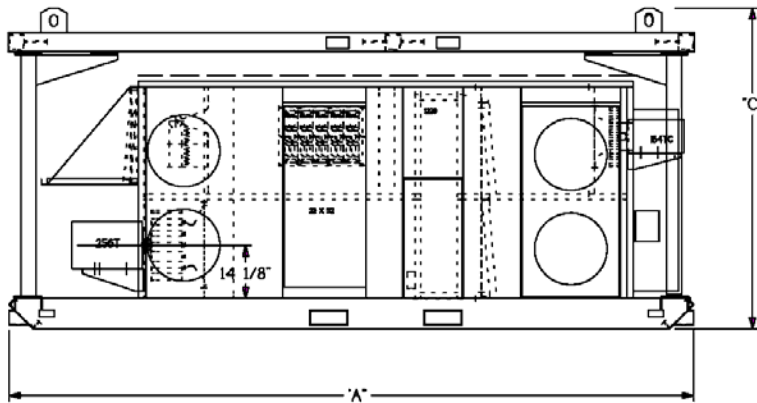

Max Air Volume	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
8,500	210	605	175	504	121	348

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
1"	7-14" w.c.	7-14" w.c.	N/A	200	17	600	6.33



#### Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- (2) 18" or 20" Round Connections
- Protective Cage